


Exhaust Fans - CDP/WS



CDP/WS fans are engineered for minimal maintenance, efficient and economical operation. Designed to exhaust relatively low volumes of air from smaller greenhouses. Each CDP/WS fan features an aluminum propeller which mounts directly to the motor shaft. Motors are permanently lubricated and totally enclosed. A welded steel inlet guard is standard. An optional speed controller accessory allows the motor speed to be varied to achieve performances from 50% to 100% of CFM ratings. Exhaust fans are 115 volt, single phase. CDP/WS are complete with fan already mounted in a galvanized steel wall sleeve, with aluminum SU shutter and mounting flanges.

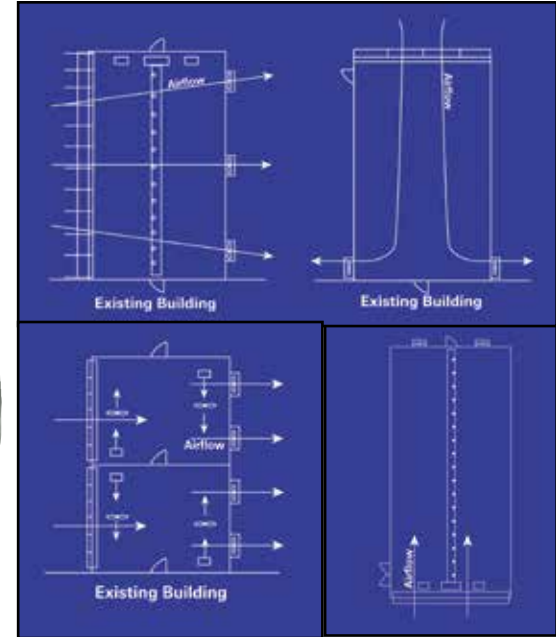

Model	Fan Size	Motor HP	CFM at Static 0"	Pressure 1/10"	Shutter Model	Catalog Number
CDP/WS7B17	7"	1/20	333	263	SU7-8	28-72700
CDP/WS8B17	8"	1/20	530	458	SU7-8	28-72710
CDP/WS10B15	10"	1/20	793	706	SU-10-12	28-72720
CDP/WS14B15	14"	1/20	1444	1028	SU-14-16	28-72730
CDP/WS16G11	16"	1/4	2388	2243	SU-14-16	28-72740
CDP/WS18G10	18"	1/4	3281	2932	SU-18-20	28-72750

